


Mounting

▶ DIN rail mounting



Dimensions

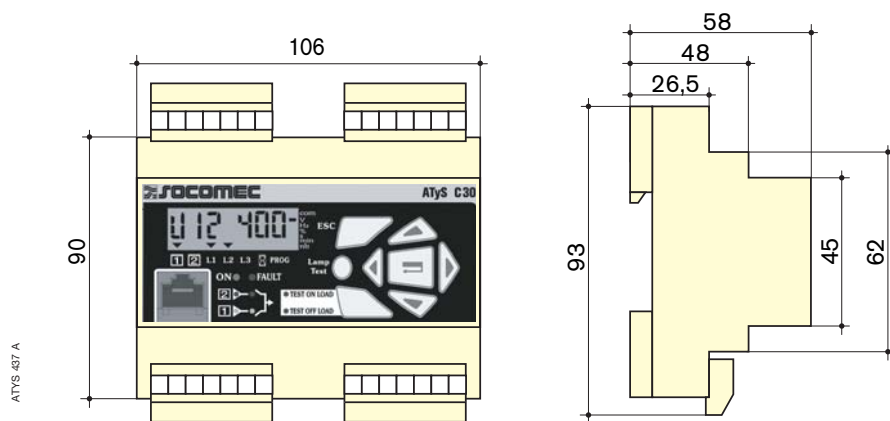

Characteristics

▶ IP

IP2 and class II on front face

▶ Operation

- Temperature: -20 °C to +60 °C
- Humidity: 80 % at 55 °C
95 % at 40 °C

▶ Consumption

7.5 VA max

▶ Measurement category

Cat III